

Solution of the three-dimensional Helmholtz equation using Krylov methods preconditioned by multigrid.

XAVIER PINEL

IN COLLABORATION WITH:

HENRI CALANDRA [TOTAL, PAU]

IAIN DUFF SERGE GRATTON XAVIER VASSEUR [CERFACS,
TOULOUSE]

CERFACS Anniversary meeting

Outline


- 1 Motivations
 - Depth migration in geophysics
- 2 Wave propagation modelling
 - Continuous problem
 - Discrete problem
- 3 Solution strategy
 - State of the art
 - Our approach
- 4 Numerical experiments
 - Three-dimensional problems
- 5 Perspectives and conclusions

Outline

- 1 Motivations
 - Depth migration in geophysics
- 2 Wave propagation modelling
 - Continuous problem
 - Discrete problem
- 3 Solution strategy
 - State of the art
 - Our approach
- 4 Numerical experiments
 - Three-dimensional problems
- 5 Perspectives and conclusions

Depth migration in geophysics

- Search for the location and the amplitude of reflecting layers that is of crucial interest in oil exploration
- Acquisition principle of a marine survey

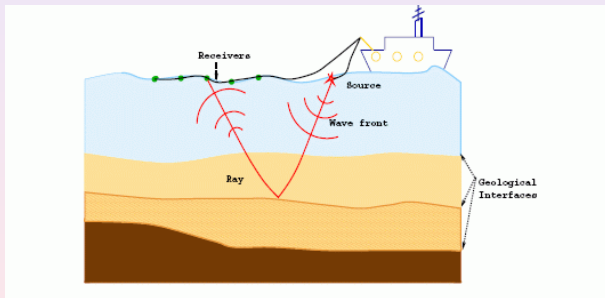

- **Goal of the long-term project:** deduce an interpretative map of the subsoil only from large-scale massively parallel computer simulations

Main features and challenges

Modelling

- Wave propagation problems modelled by the Helmholtz equation with absorbing boundary conditions
- Simulations should be made for multiple Dirac sources and for multiple frequencies
- Large computational domain [truncation of an infinite domain in the x- and y- directions]

Numerical methods

- Robust Helmholtz solution method required especially for large wavenumbers
- Able to solve multiple right-hand side and left-hand side problems
- Must be efficient on massively parallel computers due to huge problem size

Outline

- 1 Motivations
 - Depth migration in geophysics
- 2 **Wave propagation modelling**
 - **Continuous problem**
 - Discrete problem
- 3 Solution strategy
 - State of the art
 - Our approach
- 4 Numerical experiments
 - Three-dimensional problems
- 5 Perspectives and conclusions

Helmholtz problem

Continuous problem

- Helmholtz equation in the frequency domain:

$$-\Delta u - \frac{\omega^2}{v^2} u = g \quad \text{in } \Omega$$

- with radiation boundary conditions [$k = \frac{\omega}{v}$: wavenumber]:

$$\frac{\partial u}{\partial n} - i k u = 0 \quad \text{or} \quad \frac{\partial u}{\partial n} - i k u - \frac{i}{2k} \frac{\partial^2 u}{\partial \tau^2} = 0 \quad \text{on } \delta\Omega$$

- or with Perfectly Matched Layer (PML) [Berenger, 1994]

Notations

$\omega = 2\pi f$ is the angular frequency, v the velocity of the wave, u the pressure of the wave, g represents the source term

Outline

- 1 Motivations
 - Depth migration in geophysics
- 2 Wave propagation modelling
 - Continuous problem
 - Discrete problem
- 3 Solution strategy
 - State of the art
 - Our approach
- 4 Numerical experiments
 - Three-dimensional problems
- 5 Perspectives and conclusions

Finite difference frequency domain approach

Finite difference methods

- Ω is always box shaped
- Second-order finite difference discretization methods on non-equidistant grids
- Seven-point discretization in three dimensions

Accuracy requirement for second order schemes

- Accuracy requirement for second order discretization: $k h \leq \frac{\pi}{5}$
for 10 points per wavelength
- Rule of thumb: $k h$ is kept constant to 0.625 e.g. $k = 640$
induces $h = \frac{1}{1028}$
- This leads to a large complex sparse linear system !

Outline

- 1 Motivations
 - Depth migration in geophysics
- 2 Wave propagation modelling
 - Continuous problem
 - Discrete problem
- 3 **Solution strategy**
 - **State of the art**
 - Our approach
- 4 Numerical experiments
 - Three-dimensional problems
- 5 Perspectives and conclusions

State of the art

- **Sparse multifrontal direct methods:**
 - Very robust but too greedy in memory for large-scale problems
- **Multigrid methods:**
 - **Smoothing difficulty:** standard smoothers unstable for indefinite problems
 - **Coarse grid correction difficulty:** coarse grids approximations of the discrete Helmholtz operator are poor.
 - Multigrid method on the **original** Helmholtz problem [Elman et al, 2001].
 - use of Krylov methods as smoother.
 - use of a large coarse grid and multigrid as a preconditioner.
 - **Geometric** multigrid preconditioner on a complex **shifted** Helmholtz operator [Erlangga, Oosterlee, Vuik, 2006].
 - Standard smoothers are effective thanks to the shift.
 - h -ellipticity is preserved on all the grid hierarchy.

Outline

- 1 Motivations
 - Depth migration in geophysics
- 2 Wave propagation modelling
 - Continuous problem
 - Discrete problem
- 3 Solution strategy**
 - State of the art
 - Our approach**
- 4 Numerical experiments
 - Three-dimensional problems
- 5 Perspectives and conclusions

Two-grid preconditioner for the original Helmholtz problem

Intention

- Our intention is to use a two-level hierarchy to avoid both smoothing and coarse grid correction difficulties.
- Use of direct or iterative methods on coarse grid level.

[Duff, Gratton, Pinel, Vasseur, 2007]

- Large coarse grid multigrid preconditioner method acting on the original Helmholtz problem
- Multigrid is **not** a convergent method but acts as a preconditioner for the original (unshifted) Helmholtz operator
- Clustered eigenspectrum of AC^{-1} around 1 and capture the isolated eigenvalues with Krylov subspace methods

Overview

Numerical methods

- FGMRES [Saad, 1993] as a Krylov subspace method for solving $Ax = b$.
- Stopping criterion: $\frac{\|r^{(it)}\|_2}{\|r^{(0)}\|_2} \leq 10^{-6}$
- Zero initial guess: $r^{(0)} = b$
- Robustness of the solution method with respect to k ?

Benchmark problems

- Three-dimensional problems
- Homogeneous velocity fields
- PML formulation
- Possibly large wavenumbers

Outline

- 1 Motivations
 - Depth migration in geophysics
- 2 Wave propagation modelling
 - Continuous problem
 - Discrete problem
- 3 Solution strategy
 - State of the art
 - Our approach
- 4 **Numerical experiments**
 - **Three-dimensional problems**
- 5 Perspectives and conclusions

Constant wavenumber

Discretization

- Helmholtz equation in the frequency domain:

$$-\Delta u - k^2 u = g \quad \text{in } \Omega = [0, 1]^3$$

- with Perfectly Matched Layer formulation [Operto et al., 2002].
- PML width: $1/8$.
- Dirac source term located at $(\frac{1}{2}, \frac{1}{2}, \frac{1}{2})$.

Constant wavenumber: parallel experiments on CERFACS IBM JS21, direct coarse solver

Two-grid preconditioned FGMRES(5)					
k	Grid	It	Time (s) Fac.	Mem. (Mb) Fac.	Proc
30	64 ³	6	3.90	404	2
45	96 ³	7	25.18	2926	4
60	128 ³	8	71.85	10246	16
90	192 ³	9	692.43	54940	32

- Direct coarse grid approximation, linear interpolation and adjoint as restriction.
- **Smoother:** GMRES(2) preconditioned by Gauss-Seidel
- Matrix-free implementation, distributed MUMPS implementation [Amestoy et al, 2000].

Constant wavenumber: parallel experiments on CERFACS IBM JS21, iterative coarse solver

Two-grid preconditioned FGMRES(5)					
k	Grid	It	Time (s)	Iteration Time (s)	Proc
30	64 ³	7	2.87	0.41	32
45	96 ³	8	6.34	0.79	32
60	128 ³	8	15.52	1.94	32
90	192 ³	10	93.92	9.39	32
120	256 ³	11	360.20	32.75	32
180	384 ³	15	1947.39	129.82	32
240	512 ³	21	8438.04	401.81	32

- **Smoother:** GMRES(2) preconditioned by Gauss-Seidel
- On coarse level: 100 iterations of GMRES(5) preconditioned by a Gauss-Seidel iteration.


Constant wavenumber: parallel experiments on CERFACS IBM JS21, iterative coarse solver

Iteration time comparison with different numbers of processors

4 processors				32 processors			
Grid	It	Time (s)	Iteration Time (s)	Grid	It	Time (s)	Iteration Time (s)
32^3	6	0.65	0.11	64^3	7	2.87	0.41
48^3	7	2.85	0.41	96^3	8	6.34	0.79
64^3	7	9.83	1.40	128^3	8	15.52	1.94
96^3	8	65.62	8.20	192^3	10	93.92	9.39
128^3	8	241.41	30.17	256^3	11	360.20	32.75
192^3	9	1131.58	125.73	384^3	15	1947.39	129.82
256^3	11	3352.43	304.76	512^3	21	8438.04	401.81

- Equivalent results in time using the same memory by processors, except for the last row.

Constant wavenumber: history of convergence (32 processors)

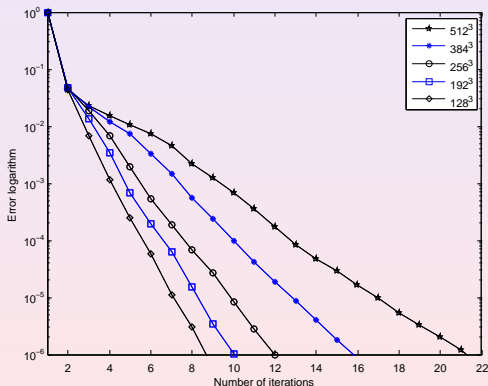

Conclusions

Summary

- **Robustness** of the two-grid approach with respect to the wavenumber k .
- Two-grid preconditioner: efficient as a preconditioner in combination with GMRES based Krylov subspace methods.
- Preconditioner based on the original Helmholtz operator.

Perspectives

- To carry on parallel implementation, analysis of efficiency.
- Improve grid transfer operators in order to use three levels in multigrid and thus reduce the size of the coarse grid problem.
- Use of direct methods on the coarse grid and Krylov subspace informations: interesting for Multiple RHS but a lot of processors is needed to handle large problems.